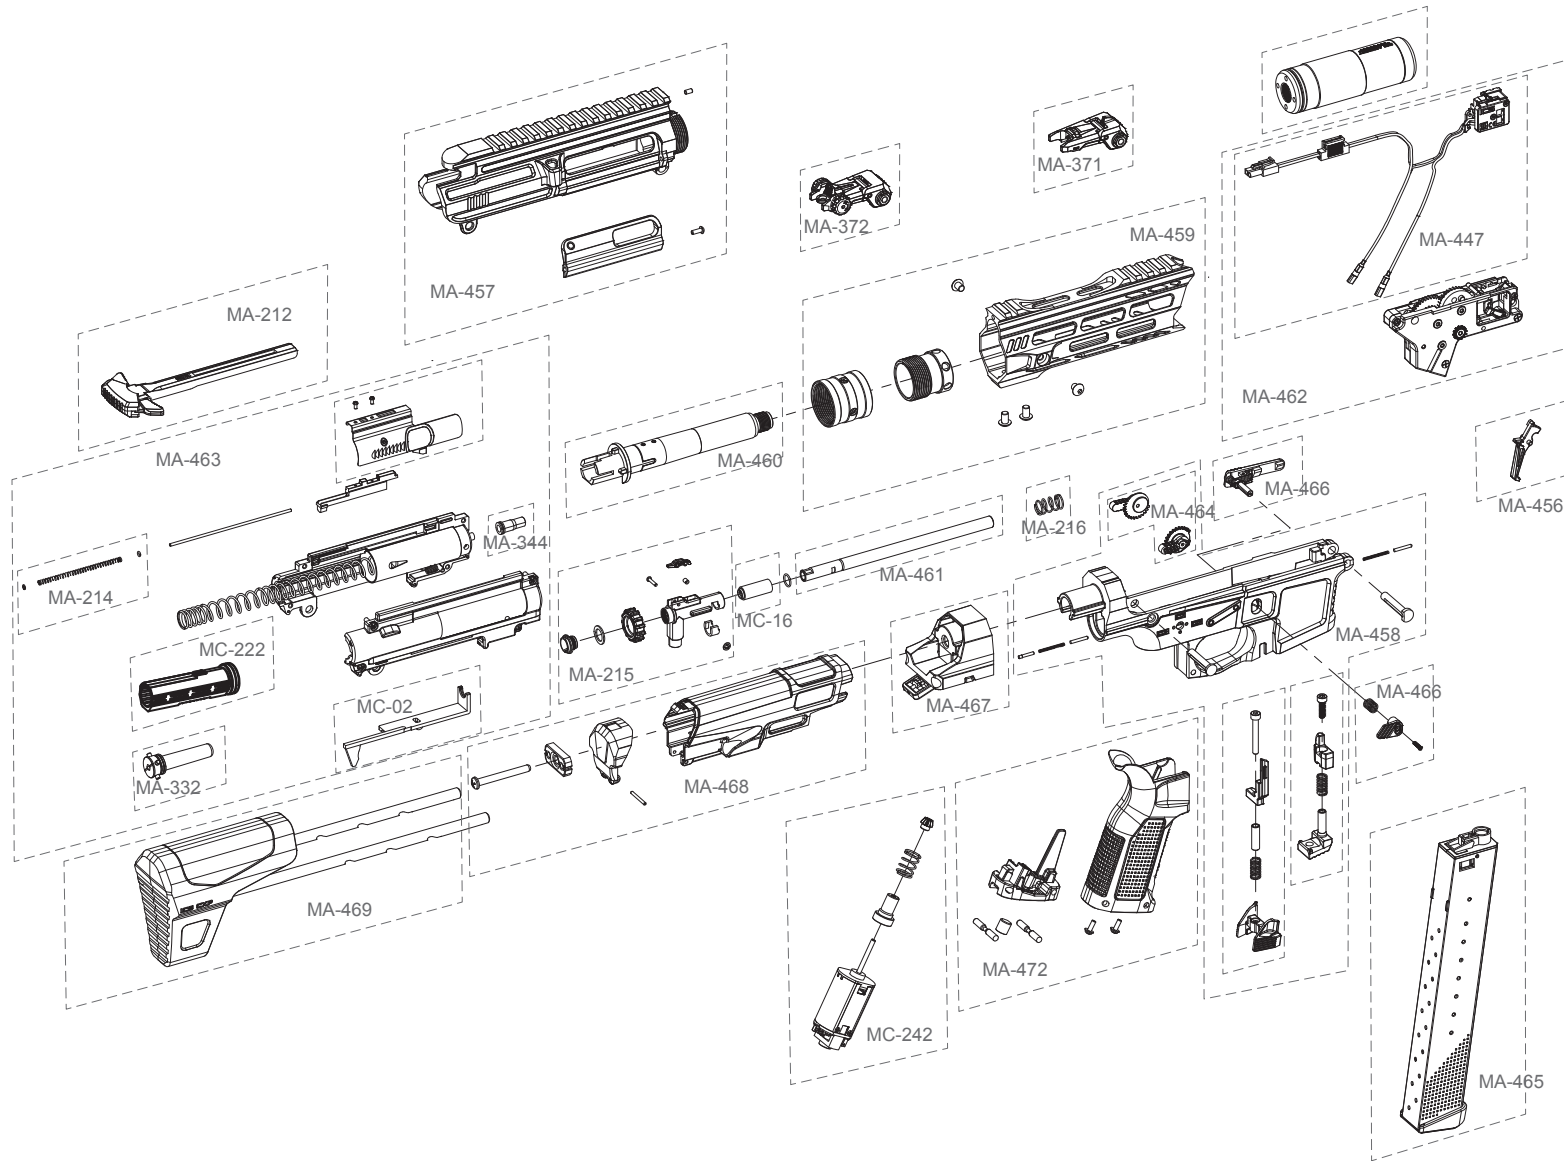


8


各部零件說明
Description■ ICS-420S3
CXP-MARS PDW9-BK*每一款槍型基本配備不同依實際出貨為主。圖片僅供參考。
The components/accessories for each model may have kind of differences depending on the actual goods. Images are only for reference.

WARNING 警告 電槍使用之注意事項 Maintenance


- 請勿使用劣質或回收BB彈，以減少槍管損耗及避免卡彈。
- 一旦發生卡彈或射擊速度降低時，應立即停止射擊，以避免齒輪過度耗損。請使用通槍條將殘彈清除，或檢測電池電量後方可繼續使用。
- 不使用本產品時，請務必將射擊選擇鈕置於保險(S)的位置上，並將電池移除並定期使用通槍條清潔槍管。
- 請依原廠附贈之保險絲規格使用。不當配置可能導致零件故障，槍內配置M100彈簧請用20A保險絲，M120彈簧請用25A保險絲。
- 彈頭直徑6mm。其槍口動能為二焦耳以下、射程範圍為50公尺以內。
- 適用年齡為十六歲以上，未成人人使用時需有成年人在場監督。
- 使用本商品不得改造或變造，並不得使用金屬彈頭。
- 「此槍非玩具」，濫用可能造成嚴重傷害，尤其是眼睛。使用時應確保本身及射擊範圍內所有人員均已確實穿戴護目鏡。
- 使用方法或注意事項請詳閱說明書內容。

- To reduce the abrasion of inner barrel and to avoid jam, please do not use inferior or reused BB pellets.
- If your gun is jammed or the muzzle velocity has decreased, please stop shooting immediately in case the gear abrades excessively. Use the clearing rod to clear out the remaining pellets, or check your battery power before continue using your gun.
- Please engage the safety, dismount the battery and clear the inner barrel with the clearing rod periodically when not using this product.
- Please use the fuse with the specification according to the original one. Equipping improper fuse might cause malfunction to the components. If your gun is applied with a M100 spring, please use 20A fuse, if applied with a M120 spring, please use 25A fuse.
- The diameter of the BB pellet is 6mm. It's muzzle energy is less than two joules, and the shooting range is within 50 meters.
- The suitable age to operate is 16 and above. Adults must supervise at aside while juveniles operate the product.
- Modify, reform, and use of metal bullets on this product are strictly forbidden.
- This is NOT a toy. Abusing might cause severe injuries, especially to the eyes. Before operating, please make sure that every Personnel in the shooting range have worn eye protections properly, including the operator himself.
- Please read the manual for instruction or precaution.

Origin: Taiwan / Manufacturer: ICS enterprise Co., Ltd / Address: No.67, Ln. 79, Dongzhou Rd., Shengang Dist., Taichung City 429, Taiwan / TEL: (886) 4-2525-6461

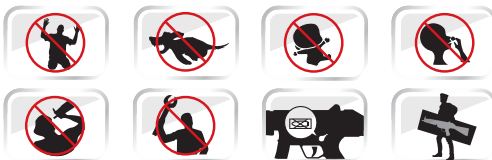BE A GAME CHANGER
ICSAIRSOFT


1

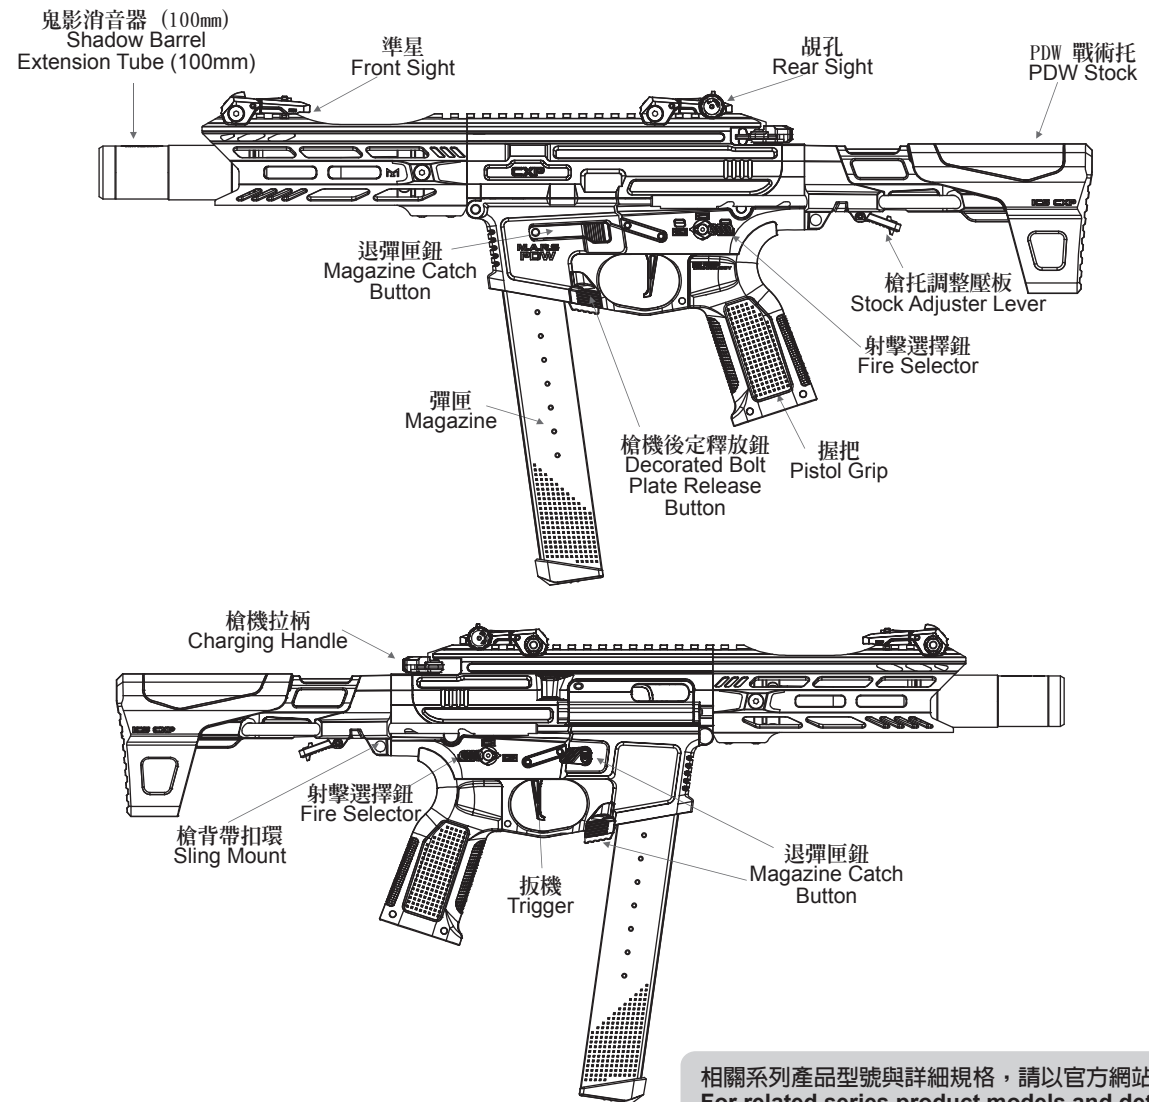各部名稱
Series Component相關系列產品型號與詳細規格，請以官方網站公布為主。
For related series product models and detailed specifications, please refer to the official website.

2

彈匣使用方式
Magazine Attachment2-1 裝BB彈方式
Load BBs將彈匣上蓋依箭頭方向打開再倒入BB彈。
Open the cover to load BBs.建議使用 6mm BB彈。
6mm caliber BBs are recommended for optimum performance.依箭頭方向旋緊彈匣底下旋鈕，即可將BB彈順利送出。
To charge BB feed spring, please rotate the gear under the magazine.2-2 裝卸彈匣
Magazine Loading and Unloading

- 直接將彈匣插入彈匣插槽。
- 按壓退彈匣鈕即可將彈匣卸下。

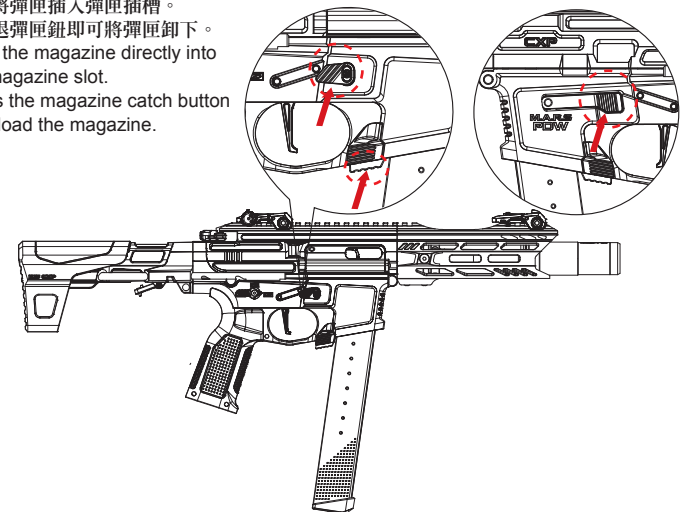


3 可動部的說明 Movable Parts

3-1 槍身結合3號齒正確位置圖 The correct position of sector gear before reassembling

注意 未進行歸位校正，會損壞活塞及齒輪

※The piston and gear may be damaged without correcting the position in advance.

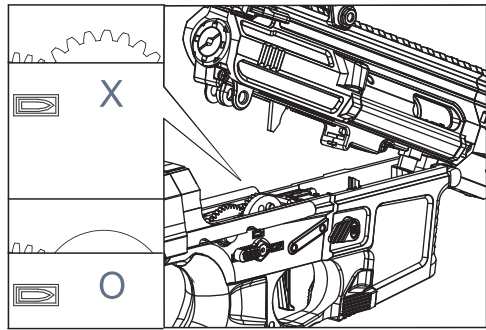

3號齒在槍身結合時，必須轉到正確位置，才可將上槍身蓋下。

Make sure the sector gear is turned to the correct position before reassembling the receiver/gearbox.

3-3 槍機の後定與復位 Decorated Bolt Plate Operation


1. 將槍機拉柄向後拉，槍機飾片即可固定在開啓狀態。
2. 按下槍機釋放鈕，槍機飾片即可復位。
1. Pull the charging handle backward to hold the decorated bolt plate at the rear position.
2. Press the decorated bolt plate button downward to return the decorated bolt plate to the original position.

Note: Do not put your finger or any foreign matter in the chamber when releasing charging handle.

4 精確射擊調整動作 Precision Targeting Adjustment


4-1 準星規孔調整方式 Front and Rear Sight Adjustment

A: 開合準星規孔 Rear and Front sights usage

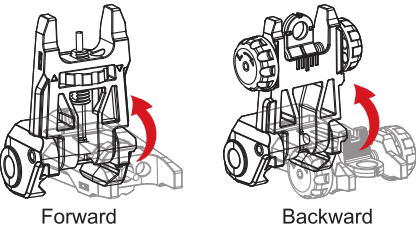


準星規孔立起或收合皆可瞄準
You can aim with the Front and Rear sight either raised or folded.

B: 規孔調整方式 Rear sight adjustment

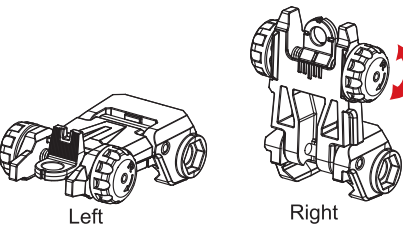

依旋鈕方向旋轉即可將規孔組左右調整
Rotate clockwise to aim right.
Rotate counter clockwise to aim left.


C: 準星高度調整 Front sight adjustment



將調整扭轉左即可升高準星；
將調整扭轉右即可降低準星。
Rotate the dial counterclockwise to raise the aiming point.
Rotate clockwise to lower the aiming point.

4-2 選擇射擊模式 Shooting Mode Setting

保險 Safety 單發 Semi Auto 連發 Fully Auto

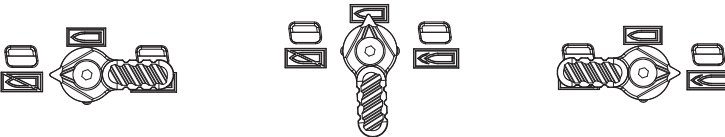


- ※此系列產品具備「關保險自動釋放彈簧功能」。
1. 槍上有彈匣的情況下，關保險會自動釋放彈簧，有機率造成第一發雙彈射出或者小便彈，屬正常情況。
 2. 槍枝使用完畢，請轉至單發模式下，擊發2~3下後做清槍動作，再關保險確保槍管內已無殘彈。
 3. 上下槍身分解前，務必先關保險釋放彈簧，避免造成齒輪倒轉損壞活塞。
- ※關保險自動釋放，可延長彈簧壽命，避免長期擠壓造成疲乏

5 H-UP彈道調整 H-UP adjustment

注意 非必要時，手指請勿放置於H-UP調整處，避免受傷


※To avoid injuries, only put your finger on the H-up adjustment when necessary.

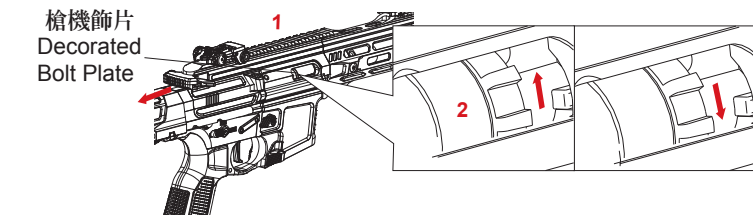

3-2 快拆尾頂桿 QD Spring Guide

1. 使用4mm六角板手，對準尾頂桿往內推入後旋轉45度
 2. 將尾頂桿與彈簧抽出
- ※安裝彈簧後依照步驟1倒序組裝


1. Use 4mm Allen key, insert it to the spring guide and then press down to turn 45 degrees.
 2. Take out the spring guide and spring.
- ※ Reverse the above steps to install spring.

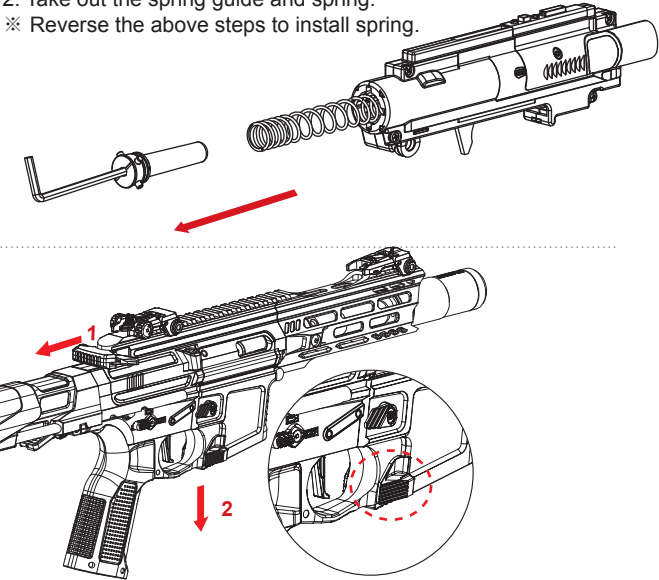



6 電池的拆裝方法 Battery Installation and Disassembling

注意 重新組裝時，必須依反向動做組合

※Reassembling is the reverse of disassembling procedures.

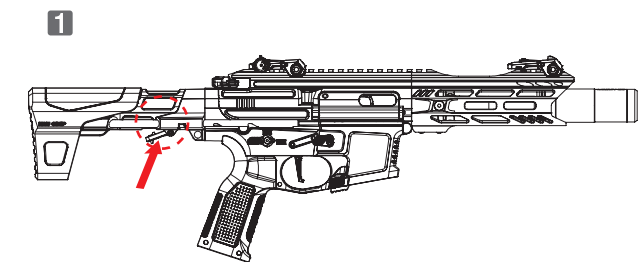

1. 按壓槍托調整壓板並將槍托拉至最後（卡桶所在位置）。
1. Press the stock adjuster lever and pull the stock to the end position.

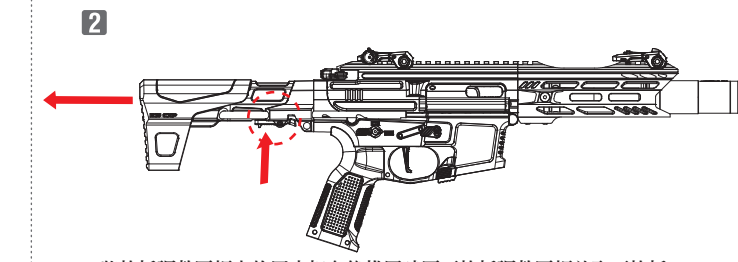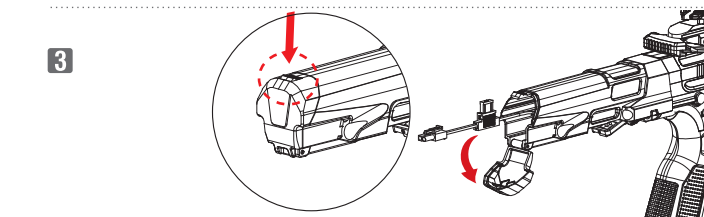


2. 將槍托調整壓板上的固定扣向後推同時壓下槍托調整壓板並取下槍托。
2. Press the stock adjuster lever and also push the latch on the stock adjuster lever, then the stock can be pulled out.


7 齒輪箱拆解 Disassemble Gearbox

注意 先卸彈匣跟電池，再進行拆解

※Unload the magazine and battery before you proceed to disassemble.

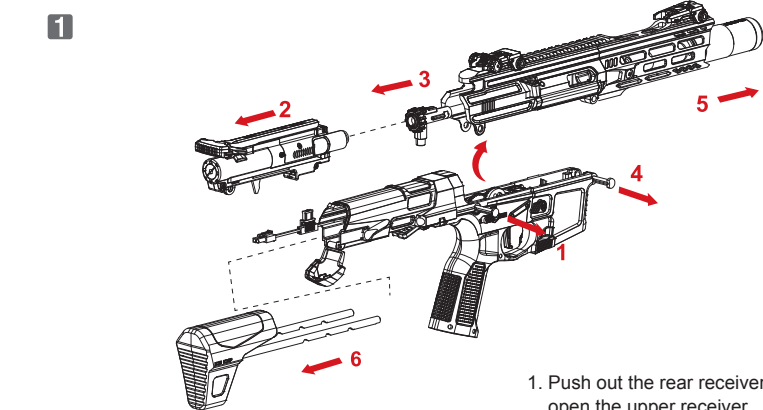


1. 先將槍身後結合銷推出即可打開上槍身
 2. 拉柄連同上齒輪箱一同取出
 3. 取出H-UP組
 4. 再將槍身前結合銷推出
 5. 取出上槍身
 6. 依步驟6取出槍托
1. Push out the rear receiver pin to open the upper receiver.
 2. Take out the charging handle with upper gearbox together.
 3. Take out the H-UP set.
 4. Push out the front receiver pin.
 5. Separate the upper receiver.
 6. Follow step.6 to remove the stock.

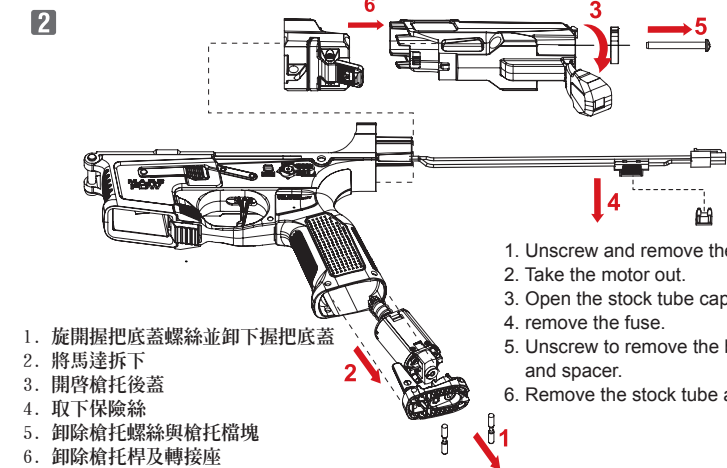


1. 旋開握把底蓋螺絲並卸下握把底蓋
2. 將馬達拆下
3. 開啓槍托後蓋
4. 取下保險絲
5. 卸除槍托螺絲與槍托檔塊
6. 卸除槍托桿及轉接座

1. Unscrew and remove the pistol grip butt cap.
2. Take the motor out.
3. Open the stock tube cap.
4. remove the fuse.
5. Unscrew to remove the buffer tube screw and spacer.
6. Remove the stock tube and the adapter.

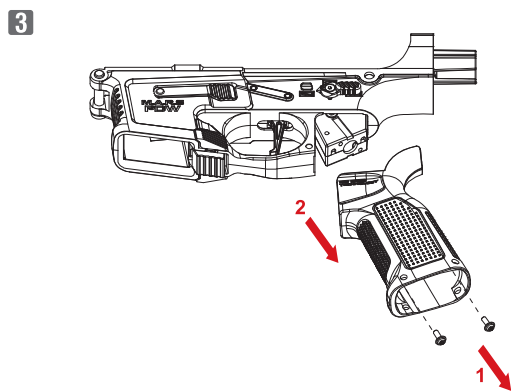

1. 旋開握把底部螺絲
2. 取下握把
1. Release the screws inside the grip.
2. Remove the grip.

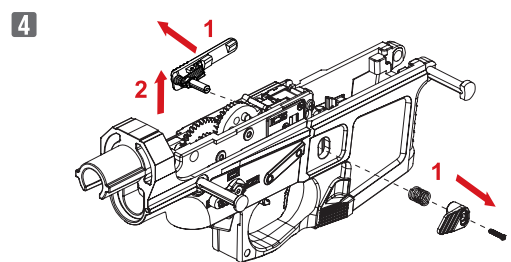

1. 卸除彈匣卡桿螺絲，取下左右側彈匣釋放鈕
2. 調整射選鈕至單發位置後，取出下齒輪箱

1. Unscrew the magazine catch screw to remove the right and left magazine catch button.
2. Turn the fire selector to semi and then take out the lower gearbox.